




Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets



Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

99100263.5

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

*Alette Fiedler*

A. Fiedler

DEN HAAG, DEN  
THE HAGUE,  
LA HAYE, LE

13/09/99



Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

**Blatt 2 der Bescheinigung**  
**Sheet 2 of the certificate**  
**Page 2 de l'attestation**

Anmeldung Nr.:  
Application no.:  
Demande n°: 99100263.5

Anmeldetag:  
Date of filing: 08/01/99  
Date de dépôt:

Anmelder:  
Applicant(s):  
Demandeur(s):  
Sony International (Europe) GmbH  
50829 Köln  
GERMANY

Bezeichnung der Erfindung:  
Title of the invention:  
Titre de l'invention:  
Synchronisation symbol structure for OFDM system

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)

Staat:	Tag:	Aktenzeichen:
State:	Date:	File no.
Pays:	Date:	Numéro de dépôt:

Internationale Patentklassifikation:  
International Patent classification:  
Classification internationale des brevets:  
H04L27/26

Am Anmeldetag benannte Vertragsstaaten:  
Contracting states designated at date of filing: AT/BE/CH/CY/DE/DK/ES/FI/FR/GB/GR/IE/IT/LI/LU/MC/NL/PT/SE  
Etats contractants désignés lors du dépôt:

Bemerkungen:  
Remarks:  
Remarques: The original title of the application reads as follows: Synchronisation symbol structure using OFDM based transmission method

Sony International (Europe) GmbH  
Sony Ref.: S99P5001EP00-PAE98-106TRDE  
Our Ref.: P21861EP

EPO - Munich  
48  
08. Jan. 1999

5

Synchronization symbol structure using OFDM based transmission method

- 10 The present invention relates to a method for generating synchronization bursts for OFDM transmission systems, a method for synchronizing wireless OFDM systems, an OFDM transmitter as well as to a mobile communications device comprising such a transmitter.
- 15 The present invention relates generally to the technical field of synchronizing wireless OFDM (orthogonal frequency division multiplexing) systems. Thereby it is known to use a synchronization burst constructed using especially designed OFDM symbols and time domain repetitions.
- 20 Particularly from the document IEEE P802.11a/d2.0 "Draft supplement to a standard for telecommunications and information exchange between systems - LAN/MAN specific requirements - part 1: wireless medium access control (MAC) and physical layer (PHY) specifications: high-speed physical layer in the 5 GHz band" a synchronization scheme for OFDM systems is proposed. This document is herewith
- 25 included by reference as far as it concerns the synchronization including the proposed implementation. Said known scheme will now be explained with reference to fig. 6 to 8 of the enclosed drawings.

Fig. 6 shows the structure of the known synchronization field. As shown in Fig. 6 the

30 synchronization field consists of so-called short symbols  $t_1, t_2, \dots, t_6$  and two long symbols  $T_1, T_2$ . In view of the present invention particularly the short symbols  $t_1, t_2, \dots, t_6$  are of interest. Among the short symbols  $t_1, t_2, \dots, t_6$  used for the amplifier gain control ( $t_1, t_2, t_3$ ) and the course frequency offset and timing control only the symbols  $t_1, t_2, t_3$  and  $t_4$  are actually generated, whereas the symbols  $t_5, t_6$  are cyclic

35 extensions (copies of the symbols  $t_1$  and  $t_2$ , respectively). It is to be noted that fig. 5 shows only the synchronization preamble structure as the structure of the following signal field indicating the type of baseband modulation and the coding rate as well as the structure of further following data fields are not of interest in view of the present invention. For further details reference is made to said prior art document.

40

The symbols t1, t2, t3, t4 are generated by means of an OFDM modulation using selected subcarriers from the entire available subcarriers. The symbols used for the OFDM modulation as well as the mapping to the selected subcarriers will now be explained with reference to fig. 6.

5

Each of the short OFDM symbols t1, ..., t6 is generated by using 12 modulated subcarriers phase-modulated by the elements of the symbol alphabet:

$$S = \sqrt{2}(\pm 1 \pm j)$$

10

The full sequence used for the OFDM modulation can be written as follows:

$$S_{-24, 24} = \sqrt{2} \{ 1+j, 0, 0, 0, 1+j, 0, 0, 0, -1-j, 0, 0, 0, -1-j, 0, 0, 0, 1-j, 0, 0, 0, -1-j, 0, 0, 0, 0, 0, 0, 1+j, 0, 0, 0, 1+j, 0, 0, 0, -1-j, 0, 0, 0, 1+j, 0, 0, 0, -1+j, 0, 0, 0, 1+j \}$$

15

The multiplication by a factor of  $\sqrt{2}$  is in order to normalize the average power of the resulting OFDM symbol.

The signal can be written as:

20

$$r_{SHORT}(t) = w_{SHORT1}(t) \sum_{k=-N_2/2}^{N_2/2} S_k \exp(j2\pi k \Delta_F t)$$

The fact that only spectral lines of  $S_{-24, 24}$  with indices which are a multiple of 4 have nonzero amplitude results in a periodicity of  $T_{FFT}/4 = 0.8 \mu\text{sec}$ . The interval  $T_{TSHORT1}$  is equal to nine  $0.8 \mu\text{sec}$  periods, i.e.  $7.2 \mu\text{sec}$ .

25

Applying a 64-point IFFT to the vector S, where the remaining 15 values are set to zero, four short training symbols t1, t2, t3, t4 (in the time domain) can be generated. The IFFT output is cyclically extended to result in 6 short symbols t1, t2, t3, ..., t6. The mapping scheme is depicted in fig. 7. The so called virtual subcarriers are left unmodulated.

30

The way to implement the inverse Fourier transform is by an IFFT (Inverse Fast Fourier Transform) algorithm. If, for example, a 64 point IFFT is used, the coefficients 1 to 24 are mapped to same numbered IFFT inputs, while the coefficients -24 to -1 are copied into IFFT inputs 40 to 63. The rest of the inputs, 25 to 39 and the 0 (DC) input, are set to zero. This mapping is illustrated in Fig. 7. After performing an IFFT the output is cyclically extended to the desired length.

35

With the proposed inverse fast Fourier transform (IFFT) mapping as shown in fig. 7 the resulting time domain signal consists of 4 periodically repeated short symbols t1, t2, t3, t4, and cyclically extended by a copy of t1, t2, which copy is depicted in fig.5 as t5, t6.

- 5 Note that in the present case only spectral lines with indices which are a multiple of 4 have nonzero amplitude. Other periodic natures can be generated by setting other multiples of the spectral lines to nonzero amplitudes.

- 10 Though the known synchronization scheme is very effective, it provides for disadvantage regarding the time domain signal properties.

- For OFDM (or in general multicarrier signals) the signal envelope fluctuation (named Peak-to-Average-Power-Ratio=PAPR) is of great concern. A large PAPR results in poor transmission (due to nonlinear distortion effects of the power amplifier) and other  
15 signal limiting components in the transmission system (e.g. limited dynamic range of the AD converter).

- For synchronization sequences it is even more desirable to have signals with a low PAPR in order to accelerate the receiver AGC (automatic gain control) locking and  
20 adjusting the reference signal value for the A/D converter (the whole dynamic range of the incoming signal should be covered by the A/D converter resolution without any overflow/underflow).

- Figures 8a, 8b show the "absolute" ( $\sqrt{\text{In}^2 + \text{Quad}^2}$ ) value of the resulting time  
25 domain signal waveform with the sequences proposed by Lucent Technologies. Oversampling (8\*) was considered in order to ensure the peak was captured correctly using the limited 64-point IFFT.

- Figures 8c, 8d show the real and imaginary part of the resulting transmitted time  
30 domain waveform. The resulting PAPR is 2.9991 dB (no oversampling) and 3.0093 dB (with 8 times oversampling).

- Therefore it is the object of the present invention to provide for a synchronization  
35 technique which bases on the known synchronization technique but which presents improved time domain signal properties to reduce the requirements for the hardware.

The above object is achieved by means of the features of the independent claims. The dependent claims develop further the central idea of the present invention.

According to the present invention therefore a method for generating synchronization bursts for OFDM transmission systems is provided. Symbols of a predefined symbol sequence are mapped according to a predefined mapping scheme on subcarriers of the OFDM system wherein the symbols of the predefined symbol sequence represent subcarriers with nonzero amplitudes. A synchronization burst is generated by inverse fast Fourier transforming the subcarriers mapped with a predefined symbol sequence. According to the present invention the predefined symbol sequence is optimized such that the envelope fluctuation of the time domain signal (Peak-to-average-power-ratio) is minimized.

The predefined symbol sequence can be chosen such that the following equations are satisfied for all symbols of the predefined symbol sequence:

$$\begin{aligned}n &= 2m, \\ C_{i-1} &= \pm C_{1-i},\end{aligned}$$

$n$  being the number of symbols of the predefined symbol sequence,  
 $m$  being an integer larger than one,  
 $C$  being the symbol value, and  
 $i$  being an integer running from 1 to  $m$ .

The mapping of the symbols of the predefined symbol sequence and the Inverse Fast Fourier Transform can be set such that the resulting time domain signal of the synchronization burst represents a periodic nature.

Alternatively the mapping of the symbols of the predefined symbol sequence and the Inverse Fast Fourier Transform is set such that one burst part of the synchronization burst in the time domain is generated and the periodic nature of the synchronization burst in the time domain is achieved by copying the one burst part.

The number of symbols of a symbol sequence ( $n$ ) can for example be 12.

The above equations define generally the symbol sequences according to the present invention. The predefined symbol sequence can therefore be for example:

A    A    A    -A    -A    -A    -A    A    -A    -A    A    -A,  
wherein A is a complex value.

Alternatively the predefined symbol sequence can be:

A    -A    A    A    -A    A    A    A    A    -A    -A    -A,  
wherein A is a complex value.

5    Alternatively the following predefined symbol sequence can be used:

A    B    -A    B    -A    -B    B    A    -B    A    -B    -A,  
wherein A, B are complex values.

As a further alternative the following sequence can be used:

10    A    -B    -A    -B    -A    B    -B    A    B    A    B    -A,  
wherein A, B are complex values.

According to the present invention furthermore a method for synchronizing wireless OFDM systems is provided, wherein a synchronization burst is generated according to a method as set forth above and the synchronization burst is transmitted respectively before the transmission of data fields.

15    Thereby the time domain signals of the synchronization burst can be precomputed and stored in a memory, such that the computation of the time domain signal of the burst is only effected once.

According to the present invention furthermore a OFDM transmitter is provided comprising a mapping unit for mapping the symbols of a predefined symbols sequence according to a predefined mapping scheme on subcarriers of the OFDM system, wherein the symbols of a predefined symbols sequence represent the subcarriers of the OFDM system with nonzero amplitudes. Furthermore an inverse fast Fourier transforming unit is provided for generating a synchronization burst by inverse fast Fourier transforming the subcarriers of the OFDM mapped with said predefined symbols sequence. The mapping unit thereby is designed such that the resulting time domain signal of the synchronization burst represents a periodic nature. The mapping unit according to the present invention uses a predefined symbol sequence which is such that the envelope fluctuation of the time domain signal of the synchronization burst is minimized.

30    According to the present invention furthermore a mobile communications device such as set forth above is used.

With reference to the figures of the enclosed drawings referred embodiments of the present invention will now be explained.

Fig. 1 shows schematically a transmitter according to the present invention,

5 Fig. 2 shows an alternative embodiment for a transmitter according to the present invention,

Fig. 3 shows an alternative mapping scheme according to the present invention,

10 Fig. 4a to 4d show the time domain signal properties achieved with the synchronization symbol structure using OFDM based transmission according to the present invention,

15 Fig. 5a to 5d show the time domain signal properties of synchronization symbol structures according to alternative embodiments of the present invention,

20 Fig. 6 shows a synchronization preamble structure known from the prior art,

Fig. 7 shows an IFFT mapping according to the prior art, and

25 Fig. 8a to 8d show the time domain properties of the synchronization symbol structure according to the prior art.

30 According to the present invention the time domain synchronization burst structure as shown in Fig. 6 is maintained. The IFFT mapping as shown in Fig. 7 can be maintained or alternatively the IFFT mapping according to figure 3 can be used. The symbol sequences mapped to the subcarriers are optimized to sequences which result in a lower PAPR.

35 According to the present invention a short OFDM symbol ( $t_1, \dots, t_6$ ) consists of 12 phase-modulated subcarriers.

	C00	C01	C02	C03	C04	C05	C06	C07	C08	C09	C10	C11
Seq0	A	A	A	-A	-A	-A	-A	A	-A	-A	A	-A
Seq1	A	-A	A	A	-A	A	A	A	A	-A	-A	-A
Seq2	A	B	-A	B	-A	-B	B	A	-B	A	-B	-A



7

Seq3	A	-B	-A	-B	-A	B	-B	A	B	A	B	-A
------	---	----	----	----	----	---	----	---	---	---	---	----

with  $A = \exp(j*2 + \pi*\varphi_A)$  and  $B = A*\exp(j\frac{\pi}{2}) = \exp(j2\pi*\varphi_A + j\frac{\pi}{2})$  and  $0.0 \leq \varphi_A < 1.0$ .

Generally the predefined symbol sequence therefore is chosen such that the envelope fluctuation of the time domain signal of the synchronization burst is minimized.

5

Therefore generally the predefined symbol sequence is set such that the following equations are satisfied for all symbols for the predefined symbol sequence:

$$n = 2m,$$

$$C_{i-1} = \pm C_{n-i}$$

10

wherein  $n$  is a number of symbols of the predefined symbol sequence,  
 $m$  is an integer larger than 1,  
 $c$  is the symbol value, and

15  $i$  is an integer value running from 1 to  $m$ .

In the following the time domain signal properties of the new sequences according to the present invention will be shown with reference to Fig. 4a to 4d and Fig. 5a to 5d.

20 For simplicity we use in our demonstration the classical quadriphase symbol alphabet,

$$S = \sqrt{\frac{1}{2}} (\pm 1 \pm j),$$

(this corresponds to  $\varphi_A = 0.125$ )

Symbol		
A	$\exp(j\frac{\pi}{4})$	$\sqrt{\frac{1}{2}} (+1+j)$
-A	$-\exp(j\frac{\pi}{4}) = \exp(j\frac{5\pi}{4})$	$\sqrt{\frac{1}{2}} (-1-j)$
B	$\exp(j\frac{\pi}{4} + j\frac{\pi}{2}) = \exp(j\frac{3\pi}{4})$	$\sqrt{\frac{1}{2}} (-1+j)$
-B	$-\exp(j\frac{3\pi}{4}) = \exp(j\frac{7\pi}{4})$	$\sqrt{\frac{1}{2}} (+1-j)$

25 Table 1: Complex symbol mapping

Fig. 5a and 5b thereby show the time domain signal (magnitude) when using the optimized sequence according to the present invention in the case of no oversampling/8-times oversampling is effected.

- 5 PAPR (in decibel) is limited to 2.059 (even when using a time domain oversampling to capture the actual peak).

Fig. 5c and 5d show the in-phase and quadrature-phase component, respectively, of the resulting wave form. It is clearly visible that the full symbol consists of four repetitions  
10 of a short sequence.

Fig. 5a to 5d show graphics corresponding to Fig. 4a to 4d for the other proposed sequences S1, S2 and S3.

- 15 With reference to Fig. 1 and 2 possible implementations of a transmitter according to the present invention will now be explained.

In the transmitter the sync symbol data 1 are prepared and mapped in a IFFT mapping unit 2 to the appropriate IFFT points. The subcarriers of the OFDM system are transformed by a IFFT unit 3 and then the time domain signal is extended in a time  
20 extension unit 4 by copying parts of the signals (for example, t1, t2 are copied to t5, t6). The time extended signal is then sent to the I/Q modulator 5.

As shown in Fig. 2 alternatively the time domain signal can be precomputed once in a  
25 computation unit 7 and then be stored in a memory 6 for the precomputed sample for the time signal. Then the time domain signal of the synchronization burst can be sent to the modulator 5 directly from the memory 6.

With reference to figure 3 a modified IFFT mapping scheme will now be explained.  
30 According to this scheme, the principle of setting only every fourth subcarrier of the OFDM system to a non-zero amplitude (see figure 7) is abandoned. Therefore the time domain signal achieved according to the mapping scheme of figure 3 will not present a periodic nature.

35 The IFFT size is now only 16 (instead of 64 as it is the case in figure 7). Only one of the bursts t1, t2, ....t6 will be generated. The other bursts can be generated by copying to retain the periodic nature of the synchronization time domain signal necessary for the correlation and synchronization on the receiving side. Therefore for example the time extension unit 4 can perform the copying of the 16-sample burst t1 generated by the

IFFT 16 according to figure 7 to the other burst  $t_2, t_3, \dots t_6$ . Obviously the mapping scheme according to figure 3 reduces the computing effort necessary for the IFFT. The periodic nature of the time domain signal of the SYNCH bursts is therefore no longer achieved by the IFFT step, but by copying the burst  $t_1$  generated with the simplified IFFT mapping scheme.

The mapping scheme shown in figure 3 is also advantageous in combination with the precomputing technique shown in figure 2.

According to the present invention therefore a synchronization burst structure to be used in high speed wireless transmission systems is proposed. The synchronization burst is constructed using especially designed OFDM symbols and time domain repetitions. The resulting synchronization burst achieves a high timing detection and frequency offset estimation accuracy. Furthermore the burst is optimized to achieve a very low envelope fluctuation (Low peak-to-average-power-ratio) to reduce the complexity on the receiver and to reduce time and frequency acquisition time at the receiver.

Therefore the synchronization performance can further be improved. As with the scheme according to the present invention the envelope of the OFDM based synchronization burst in the time domain is reduced, the AGC pool-in speed at the receiver can be improved and an accurate time and frequency synchronization can be achieved. Furthermore the synchronization complexity on the receiver side can be reduced due to the reduced resolution requirements necessary due to reduced envelope fluctuation.

The advantages of the present invention can be set forth as following:

- An OFDM based SYNCH symbol with a reduced Peak-to-Average-Power-Ratio (PARP) is proposed,
- Improved synchronization performance (compared to the state of the art proposal),
- Reduced AGC (automatic gain control) pull-in time due to reduced dynamic range of the SYNCH burst,
- Improved AGC settlement (AGC has to adjust to a incoming signal level that later on now overflow/underflow in the AD happens. The reduced dynamic range of the SYNCH burst help to find this reference level more accurate),
- Reduced synchronization detection complexity on the receiver (reduced resolution necessary due to reduced envelope fluctuation).

EPO - Munich  
48  
08. Jan. 1999

Sony International (Europe) GmbH  
Sony Ref.: S99P5001EP00-PAE98-106TRDE  
Our Ref.: P21861EP

5

Claims:

1. Method for generating synchronization bursts for OFDM transmission systems,  
10 comprising the following steps:  
- mapping (2) the symbols of a predefined symbol sequence according to a predefined mapping scheme on subcarriers of the OFDM system, wherein the symbols of the predefined symbol sequence represent subcarriers of the OFDM system with non-zero-amplitudes, and  
15 - generating a synchronization burst by Inverse Fast Fourier Transforming (3) the subcarriers of the OFDM system mapped with the symbols of said predefined symbol sequence,  
c h a r a c t e r i z e d i n t h a t  
the predefined symbol sequence is set such that the envelope fluctuation of the time  
20 domain signal of the synchronization burst is minimized.

2. Method according to claim 1,  
characterized in that  
the predefined symbol sequence is chosen such that the following equations are satisfied  
25 for all symbols of the predefined symbol sequence:

$$n = 2m,$$

$$C_{i-1} = \pm C_{n-i}$$

wherein:

- n is the number of symbols of the predefined symbol sequence,  
30 m is an integer larger than one,  
C is the symbol value, and  
i is an integer running from 1 to m.

3. Method according to anyone of the preceding claims,

characterized in that

the mapping (2) of the symbols of the predefined symbol sequence and the Inverse Fast Fourier Transform is set such that the resulting time domain signal of the synchronization burst represents a periodic nature.

5

4. Method according to anyone of the preceding claims,  
characterized in that

the mapping (2) of the symbols of the predefined symbol sequence and the Inverse Fast Fourier Transform is set such that one burst part of the synchronization burst in the  
10 time domain is generated and the periodic nature of the synchronization burst in the time domain is achieved by copying the one burst part.

5. Method according to anyone of the preceding claims,  
characterized in that

15 the number of symbols of a symbol sequence  $n$  is equal to 12.

6. Method according to anyone of the preceding claims,  
characterized in that

the symbol values  $C$  of the predefined symbol sequence can be expressed as:

20 A A A -A -A -A -A A -A -A A -A,  
A being a complex value.

7. Method according to anyone of claims 1 to 5,  
characterized in that

25 the symbol values  $C$  of the predefined symbol sequence can be expressed as:

A -A A A -A A A A -A -A -A  
A being a complex value.

8. Method according to anyone of claims 1 to 5,  
30 characterized in that

the symbol values  $C$  of the predefined symbol sequence can be expressed as:

A B -A B -A -B B A -B A -B -A

12

A, B being complex values.

9. Method according to anyone of claims 1 to 5,  
characterized in that

5 the symbol values C of the predefined symbol sequence can be expressed as:

A    -B    -A    -B    -A    B    -B    A    B    A    B    -A

A, B being complex values.

10. Method for synchronizing wireless OFDM systems,  
10 characterized by the steps of

- generating a synchronization burst according to a method according to anyone of the preceding claims, and
- transmitting the synchronization burst.

15 11. Method according to claim 10,  
characterized in that

the time domain signal of the synchronization burst is precomputed (7) and stored in a memory (6).

20 12. OFDM transmitter,  
comprising:

- a mapping unit (2) for mapping the symbols of a predefined symbol sequence according to a predefined mapping scheme on subcarriers of the OFDM system, wherein the symbols of the predefined symbol sequence represent subcarriers of the
- 25 OFDM system with non-zero amplitudes, and
- an Inverse Fast Fourier Transforming unit (3) for generating a synchronization burst by Inverse Fast Fourier Transforming (3) the subcarriers of the OFDM system mapped with the symbols of said predefined symbol sequence,

characterized in that

30 the mapping unit (2) uses a predefined symbol sequence which is set such that the envelope fluctuation of the time domain signal of the synchronization burst is minimized.

13. OFDM transmitter according to claim 12,  
characterized in that  
the predefined symbol sequence is set such that the following equations are satisfied for  
5 all symbols of the predefined symbol sequence:

$$n = 2m,$$

$$C_{i-1} = \pm C_{n-i}$$

wherein:

- n is the number of symbols of the predefined symbol sequence,  
10 m is an integer larger than one,  
C is the symbol value, and  
i is an integer running from 1 to m.

14. OFDM transmitter according to anyone of claims 12 or 13,  
15 characterized in that  
the mapping unit (2) is designed such that the resulting time domain signal of the  
synchronization burst represents a periodic nature.

15. OFDM transmitter according to anyone of claims 12 or 13,  
20 characterized in that  
the mapping unit (2) is designed such that one burst part of the synchronization burst in  
the time domain is generated and the periodic nature of the synchronization burst in the  
time domain is achieved by copying the one burst part.

- 25 16. OFDM transmitter according to claim 15,  
characterized in that  
a time extension unit (4) copies the burst part to achieve a periodic nature of the time  
domain signal.

- 30 17. OFDM transmitter according to anyone of claims 12 to 16,  
characterized in that  
the number of symbols of a symbol sequence n is equal to 12.

15

comprising a transmitter according to anyone of claims 12 to 22.



18. Transmitter according to anyone of the claims 12 to 17,

characterized in that

the symbol values C of the predefined symbol sequence can be expressed as:

5    A    A    A    -A    -A    -A    -A    A    -A    -A    A    -A,  
A being a complex value.

19. Transmitter according to anyone of claims 12 to 17,

characterized in that

10    the symbol values C of the predefined symbol sequence can be expressed as:

A    -A    A    A    -A    A    A    A    A    -A    -A    -A  
A being a complex value.

20. Transmitter according to anyone of claims 12 to 17,

15    characterized in that

the symbol values C of the predefined symbol sequence can be expressed as:

A    B    -A    B    -A    -B    B    A    -B    A    -B    -A  
A, B being complex values.

21. Transmitter according to anyone of claims 12 to 17,

characterized in that

the symbol values C of the predefined symbol sequence can be expressed as:

A    -B    -A    -B    -A    B    -B    A    B    A    B    -A  
A, B being complex values.

25

22. Transmitter according to anyone of claims 12 to 21,

characterized by

a processing unit (7) for precomputing the time domain signal of the synchronization  
burst and a memory (6) for storing the precomputed time domain signal of the  
30    synchronization burst.

23. Mobile communications device,

EPO - Munich  
48  
08. Jan. 1999

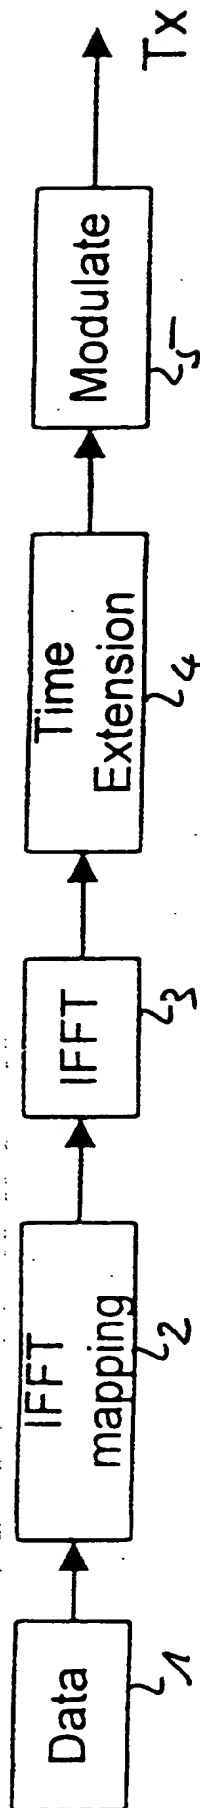


Fig. 1

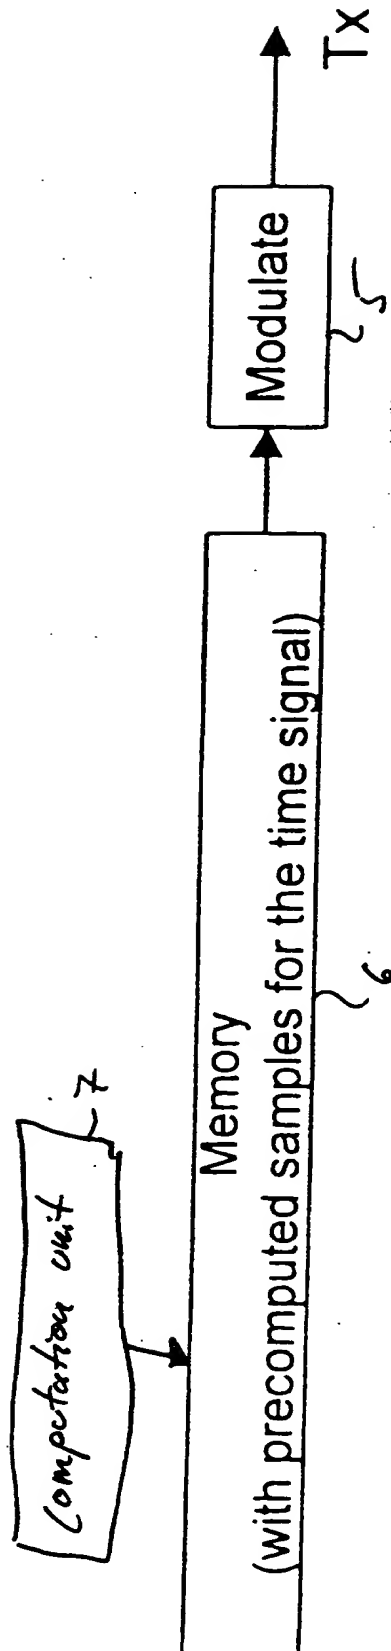


Fig. 2

216



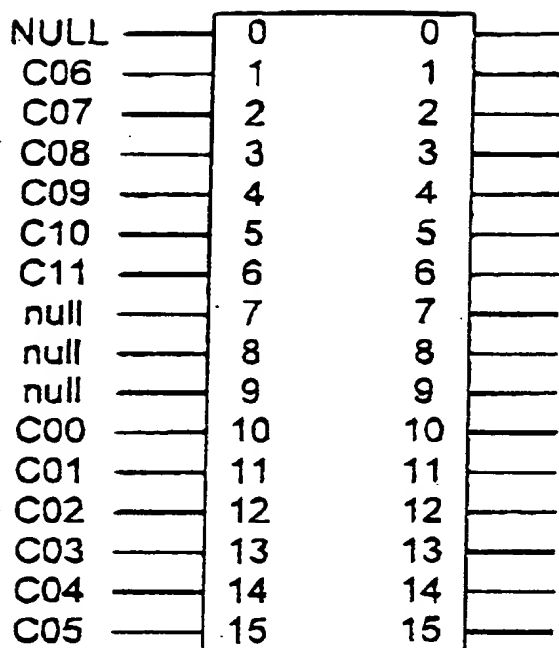



Fig. 3

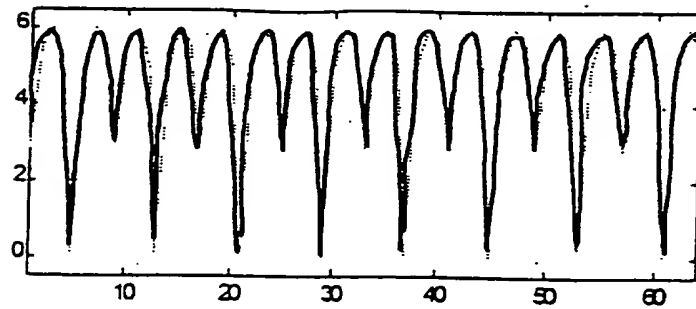


a.)

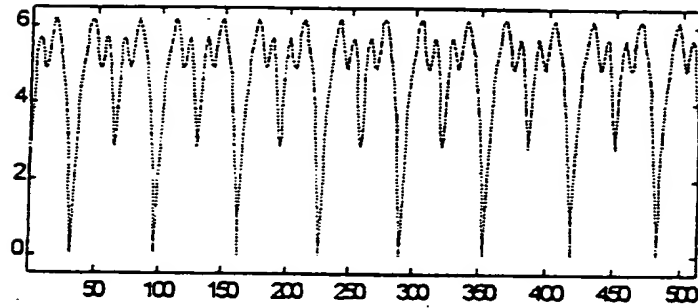

b.)

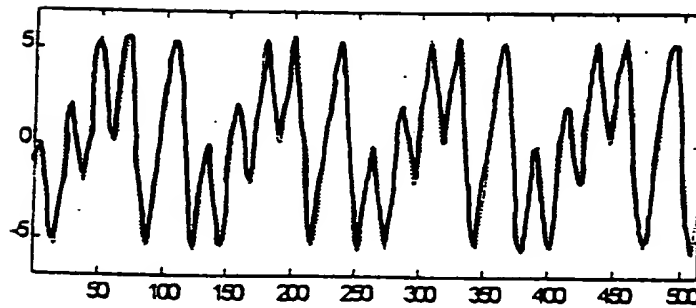


c.)

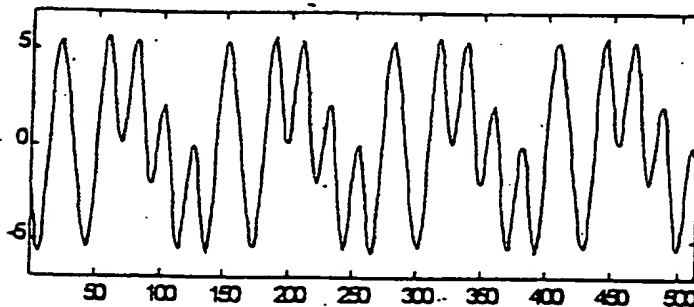

d.)

Fig. 2

Fig. 5

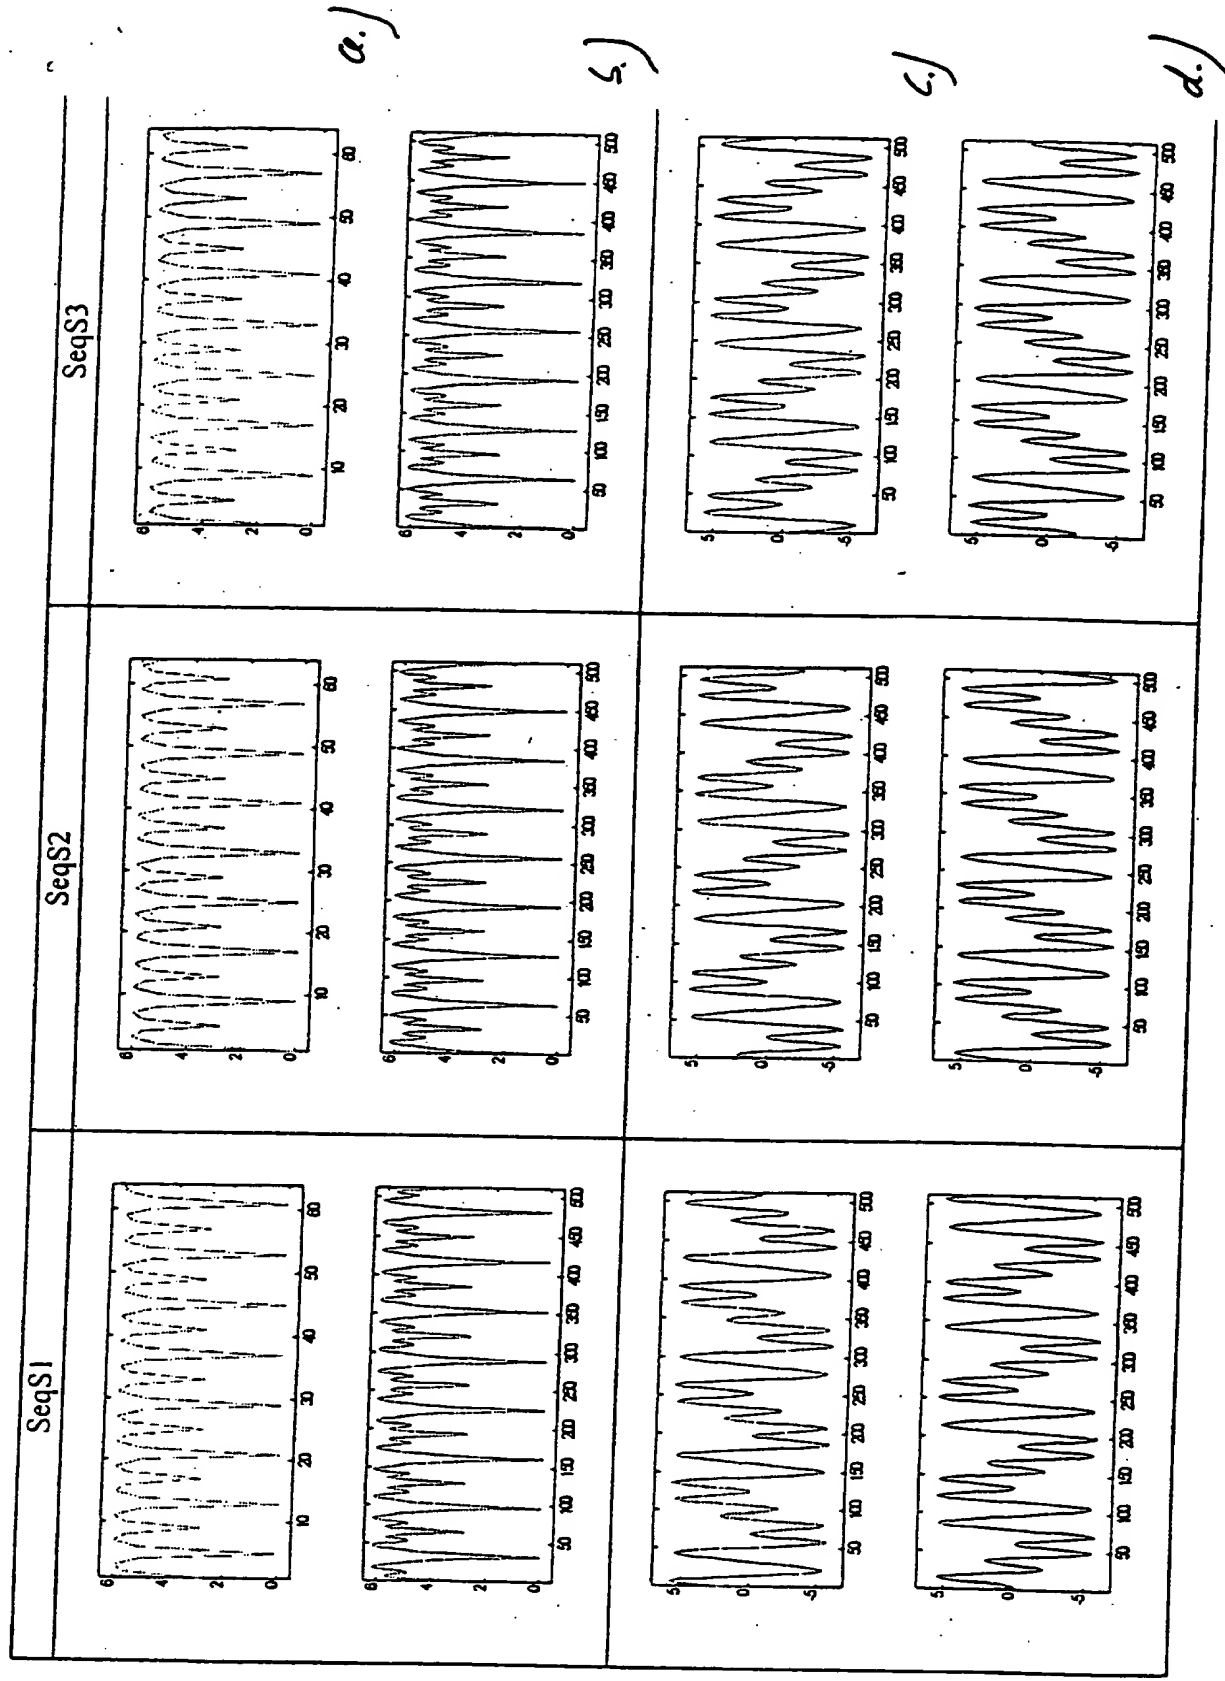

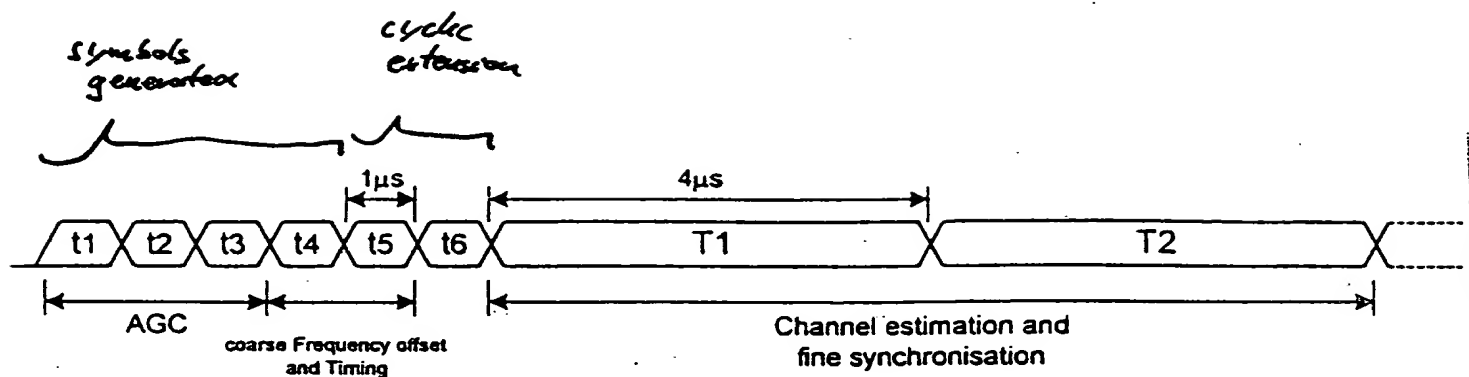


Fig. 5



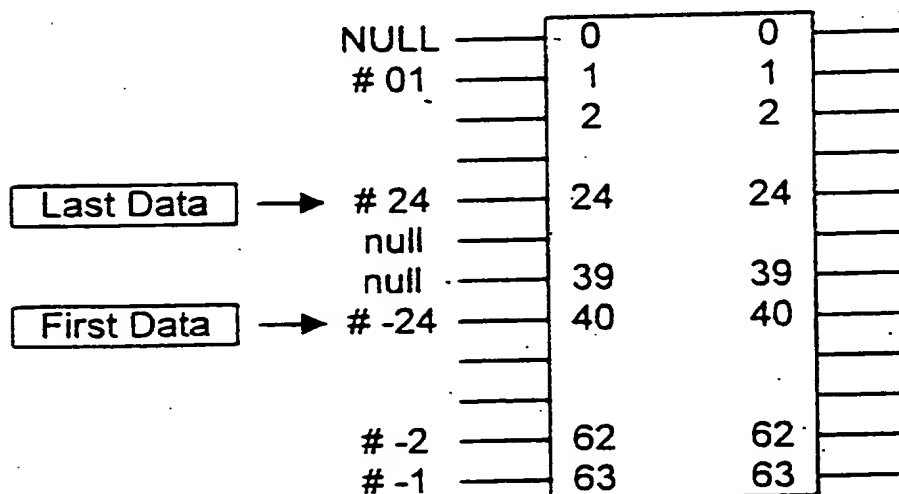



Fig. 7

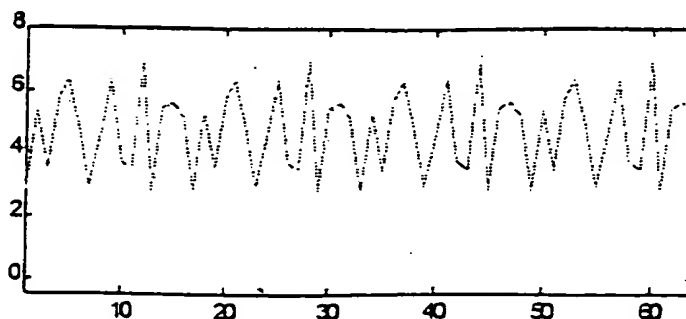


a.)

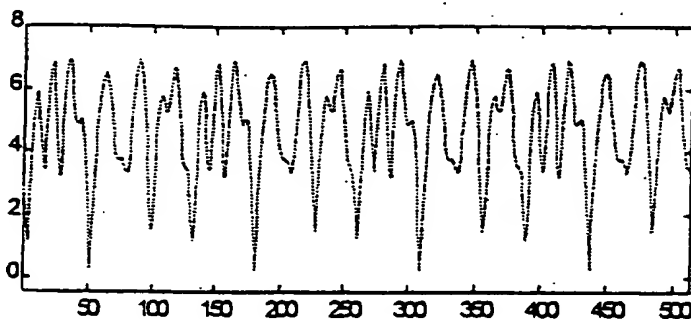

b.)

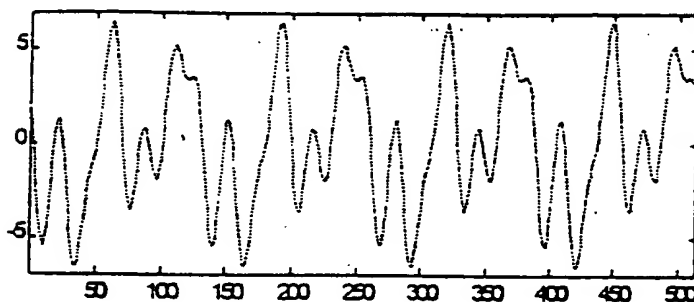

c.)

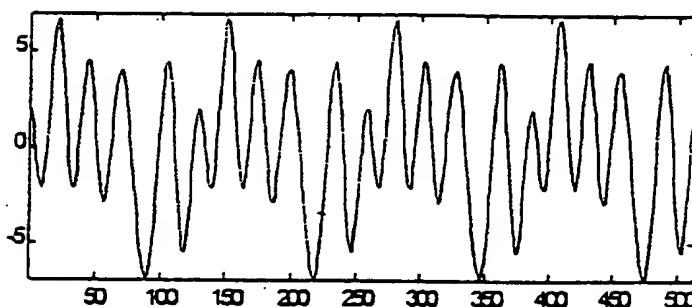

d.)

Fig 8

Sony International (Europe) GmbH  
Sony Ref.: S99P5001EP00-PAE98-106TRDE  
Our Ref.: P21861EP

EPO - Munich  
48  
08. Jan. 1999

5

### Abstract

10 The present invention proposes a method for generating synchronization bursts for OFDM transmission systems. The symbols of a predefined symbol sequence are mapped according to a predefined mapping scheme on subcarriers of the OFDM systems by a mapping unit (2), wherein the symbols of the predefined symbol sequence represent subcarriers of the OFDM system with nonzero amplitudes. A synchronization burst is generated by a inverse fast Fourier transforming unit (3) transforming the subcarriers of the OFDM system mapped to said predefined symbol sequence. The mapping (2) of the symbols of the predefined symbol sequence is set such that the resulting time domain signal of the synchronization burst represents a periodic nature. According to the invention the predefined symbol sequence is set such that the envelope fluctuation of the time domain signal of the synchronization burst is minimized. Therefore advantageous symbol sequences reducing said the envelope fluctuation of the time domain signal are proposed.

15  
20

Fig. 1